

MAIZE HEAD
SGS

Rowfree



Maizco[®]


THE HEAD THAT BEST HARMONIZES WITH YOUR HARVEST

One single header, all distances and directions

The new SGS Rowfree maize header provides total versatility and flexibility in harvesting, allowing you to work without having to follow the line of row and without having to of a specific header for each distance or direction.

Prepared for maximum performance, the best crop treatment and the highest efficiency, ensures the least loss of harvest even in the most adverse conditions:

- Fallen or broken corn
- Harvesting on headlands
- Row spacing errors during planting
- Harvesting on level curves

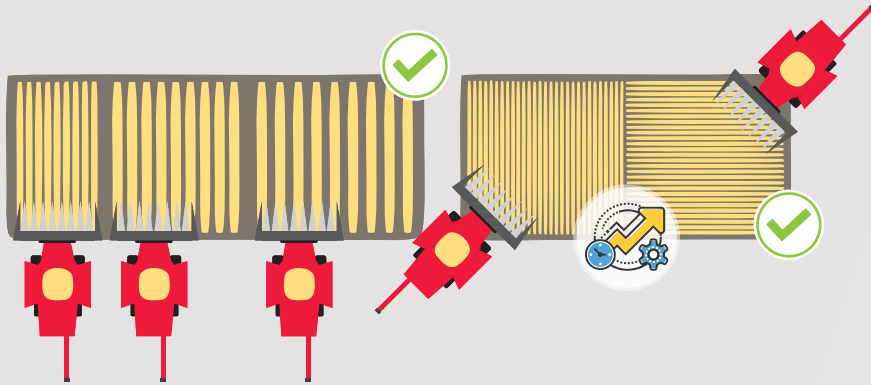

	Model SGS	7.4	8.4	9.5	10.5
	Collections units	14	16	18	20
	Collection quantity				
	350 mm	21	24	27	30
	380 mm	19	22	25	28
	400 mm	18	21	24	26
	420 mm	18	20	23	25
	450 mm	16	19	21	23
	525 mm	14	16	18	20
	700 mm	11	12	14	15
	760 mm	10	11	12	14
	Overall dimensions:				
	Working width (m)	7,35	8,40	9,45	10,50
	Transport width (m)			2.39	
	Transport height (m)			2.32	
	Weight (kg)	3.140	3.550	3.970	4.395

Advanced technology for unique results

Composite gathering chains, for more efficient collection.

Exclusive system to guide misaligned stalks and transporting ears. The front chain is designed to synchronize the guidance with the plants coming in from the planting, which optimizes the power supply to the row unit. The rear chain is configured for the excellent transport of the ears to the auger.

Simultaneous deck plates.

With adjustment drive for both plates, that always keeps the slot in the collection unit; this allows the level of non-grain material fed into the combine. Harder edges, to prolong its life useful.

Snapping rolls.

Spiral design at the front end. Zone traction system consisting of 6 interleaved pallets and geared.

Snouts and hoods.

They improve the performance of work on crops misaligned. Because of their shape and arrangement, allow the level of losses per head to be reduced, with less agitation on the material that enter. They have height adjustment and folding for easy transport, tips with skids at the ends (which prevent breaks due to soil embedding), and hoods reinforced with stainless steel, for a better Material sliding.

Adapter.

Achieves smooth and even delivery to the carrier. Allows the angle of attack of the head to be adjusted. It is interchangeable: it easily adjusts to any make and model of combine.

Standard components.

Land copying system, side augers and double beam trailer with elastics.



Maizco

THE HEAD THAT BEST HARMONIZES WITH YOUR HARVEST